



## Description

The Convex collection experiments with BROKISGLASS and makes use of its specific properties and processing methods. Designed and manufactured in the form of a convex lens, it pushes the boundaries of function, visual representation, and shaping of this unique and vibrant material. Together with a minimalist, precisely crafted body, it creates an unobtrusive yet unconventional luminaire. The utilitarian design, which highlights the beauty and optical properties of the glass, is well suited to a broad range of applications in both residential and commercial spaces. The Convex collection comprises a pendant and a wall light, each available in two sizes, whereas the wall variant can also be mounted on the ceiling. Choose from clear triplex opal, or a combination of clear triplex opal and grey triplex opal, where the darker fragments gradually transition to lighter towards the centre of the glass.




## Tech. description

The light comprises a milled dural body with integrated LED module and balancing system and a mounting bracket. The Brokisglass shade is attached to the body of the light via bayonet system. The light is intended for installation on a wall or ceiling.

## CONSTRUCTION SPECIFICATION

Weight:	10 kg
Construction material:	glass, metal
Cord length [mm]:	2.200 mm
Mounting:	Ceiling
Environment:	Indoor

## DIMENSIONS [mm]



## ELECTRICAL SPECIFICATION

Input voltage [V]:	100 - 240 V
Frequency [Hz]:	50-60 Hz
Max. power [W]:	88 W
Coverage IP:	20
Socket:	-
Light source:	LED module
Energy class:	E

## CERTIFICATIONS





### CM17867

<b>Type</b>	LED module
<b>Lamp wattage [W]</b>	75 W
<b>Input voltage [V]</b>	24 VDC
<b>Energy class</b>	E
<b>Flux [lm]</b>	9983 lm
<b>Light colour [K]</b>	2700 K
<b>CRI</b>	90
<b>Dimmable</b>	yes

### CM17868


<b>Type</b>	LED module
<b>Lamp wattage [W]</b>	75 W
<b>Input voltage [V]</b>	24 VDC
<b>Energy class</b>	E
<b>Flux [lm]</b>	7430-11987 lm
<b>Light colour [K]</b>	1800-6500 K
<b>CRI</b>	90
<b>Dimmable</b>	yes





### INNER FIXTURE

Dimensions w x h [mm] 257 x 44 mm  
Weight [kg] 1.1 kg  
Material metal

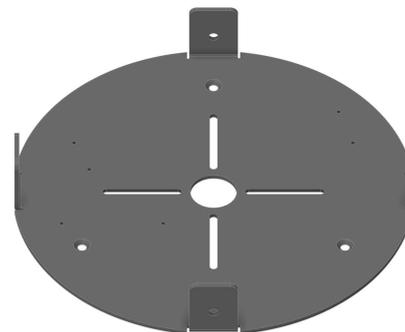

### Drawing

### Hole placement

